



**QUTONE CERAMIC PVT. LTD.**

**HEAD OFFICE:**

**Ahmedabad:**

11, Titanium, Corporate Road, Opp. Prahalad Nagar Garden, Satellite, Ahmedabad-15.  
Tel.: +91 79-65108800-9900, 40300075

**REGIONAL OFFICES:**

**Gurgaon:**

Plot No. 117, Sector 44,  
Gurgaon - 122003, Haryana.  
Tel. +91-124-4223770

**Mumbai:**

1008, ECOSTAR Building, Vishweshwar Nagar,  
Bh. Udipi Vihar Hotel, Goregaon (E),  
Mumbai - 400063 - Maharashtra

**Bangalore:**

FF09, City Point, #13, Infantry Road,  
Bangalore - 560001 - Karnataka  
Tel: +91-80-40922655

**Kochi:**

A.K.M. Charitable Trust, A.K. Towers,  
2nd Floor, South Kalamaserry,  
Kochi - 682033 - Kerala

**Hyderabad:**

Flat No. G2, 1-20-268, Survey No. 72,  
Kaizen Mirza White House, Nr. Begumpet,  
Rasoolpura, Secunderabad - 500003

Hotline Number: +91 9015224422 | E-mail: [info@qutoneceramic.com](mailto:info@qutoneceramic.com) | [www.facebook.com/qutoneceramicindia](http://www.facebook.com/qutoneceramicindia)

web: [www.qutoneceramic.com](http://www.qutoneceramic.com)

*Bench marking the*  
**Exteriors**

OUTDOOR PORCELAIN COLLECTION

[www.qutoneceramic.com](http://www.qutoneceramic.com)



Since its inception in the year 2008, Qutone has been creating a sustainable mark in Domestic as well as Global Tile industry. It has remarkably achieved outstanding success by blending Innovation with Fashion apart from consistent International Quality Standards.

Qutone has set a benchmark for its creativity in its product and services. It has been known for delivering mesmerizing designs that create a magic in the living spaces. The brand has earned an unmatched reputation and has emerged as a company which has set its trend on both quality and designs for others to follow. It has truly been a trend setter in the industry. Qutone design exemplifies meaningful surrounding & unique ambience with its beautiful craftsmanship.

Inspiration has always been Qutone's Principle philosophy. Drawing Inspiration from breathtaking nature to architectural monuments to routine conversations, products are delivered in its true form & style.

## OUTDOOR PORCELAIN COLLECTION

SELENE SERIES	04
ELEMENT SERIES	06
NEO SERIES	07
RAVENA SERIES	08
WOOD SERIES	09
GLOSSY SERIES	10

MATT



Selene Coffee



Selene Beige



Selene Crema



Selene Verde Dark


MATT



Selene Verde Light




Selene Negro

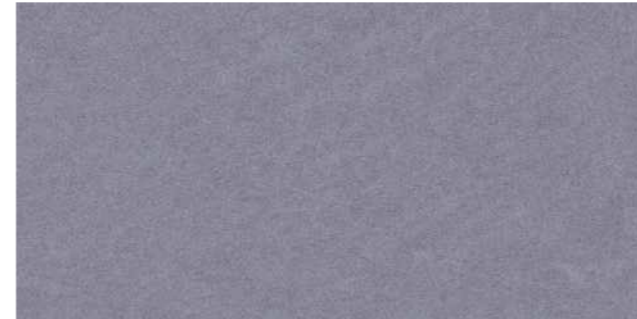

Selene Gris



Selene Bianco

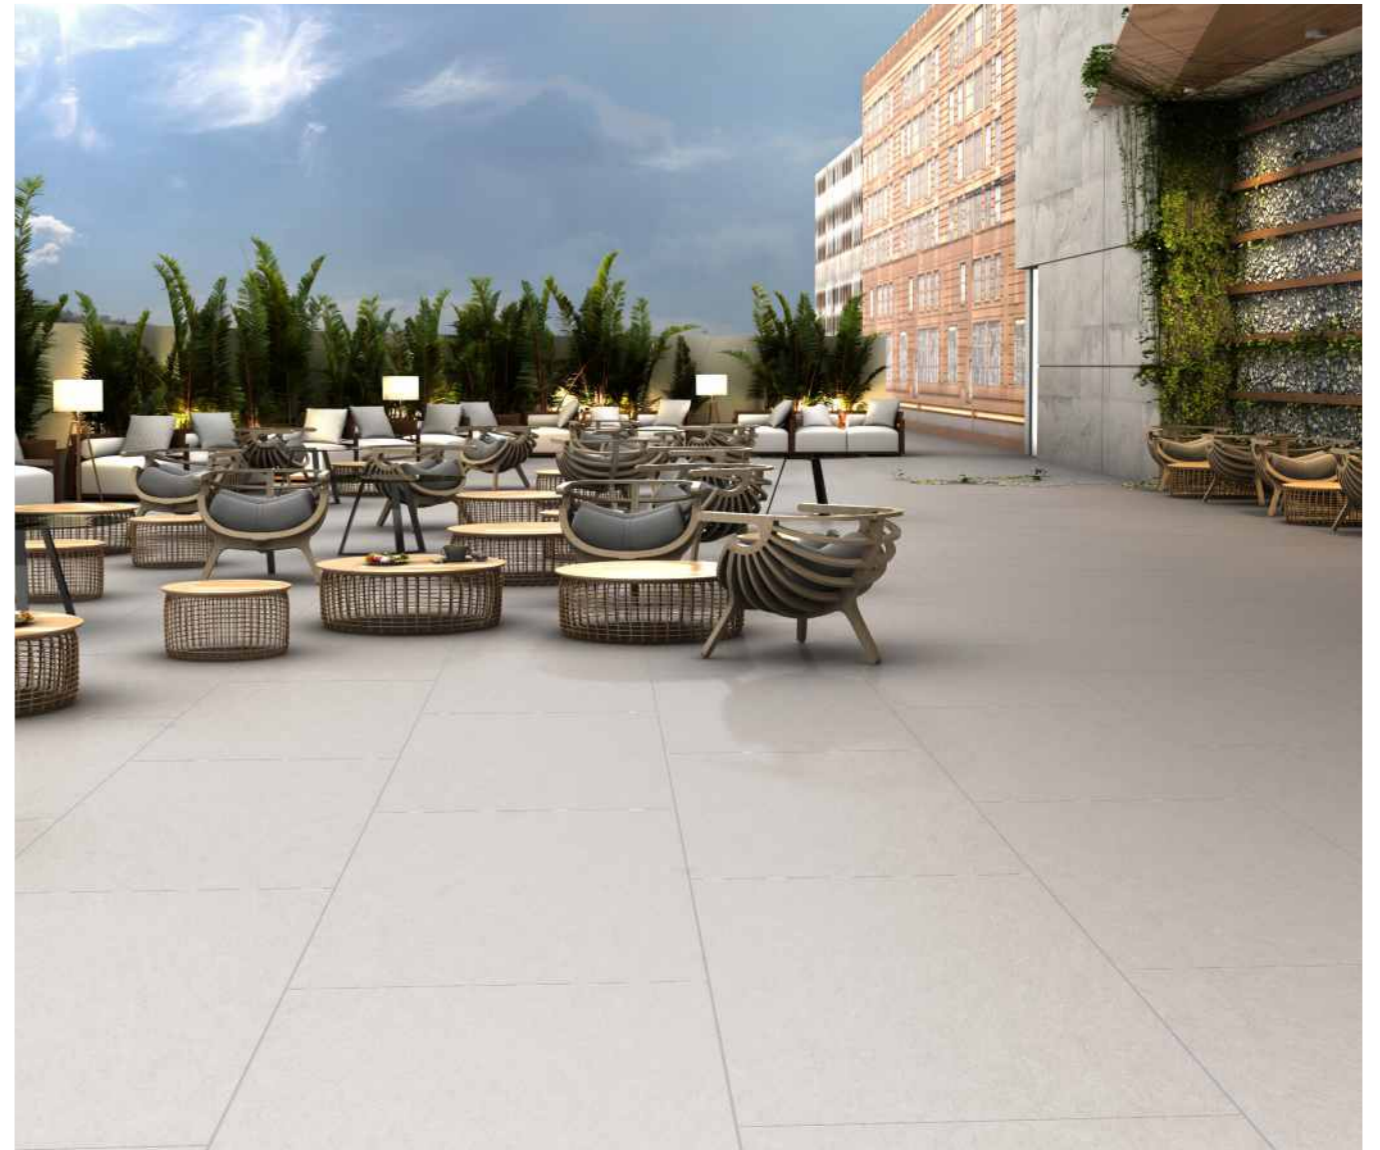

MATT



Element Mocha



Element Crema



Element Negro



Element Gris



Element Verde



Neo Brown



Neo Mocha

MATT



Neo Crema




Neo Grey




Neo Verde




Neo Bianco

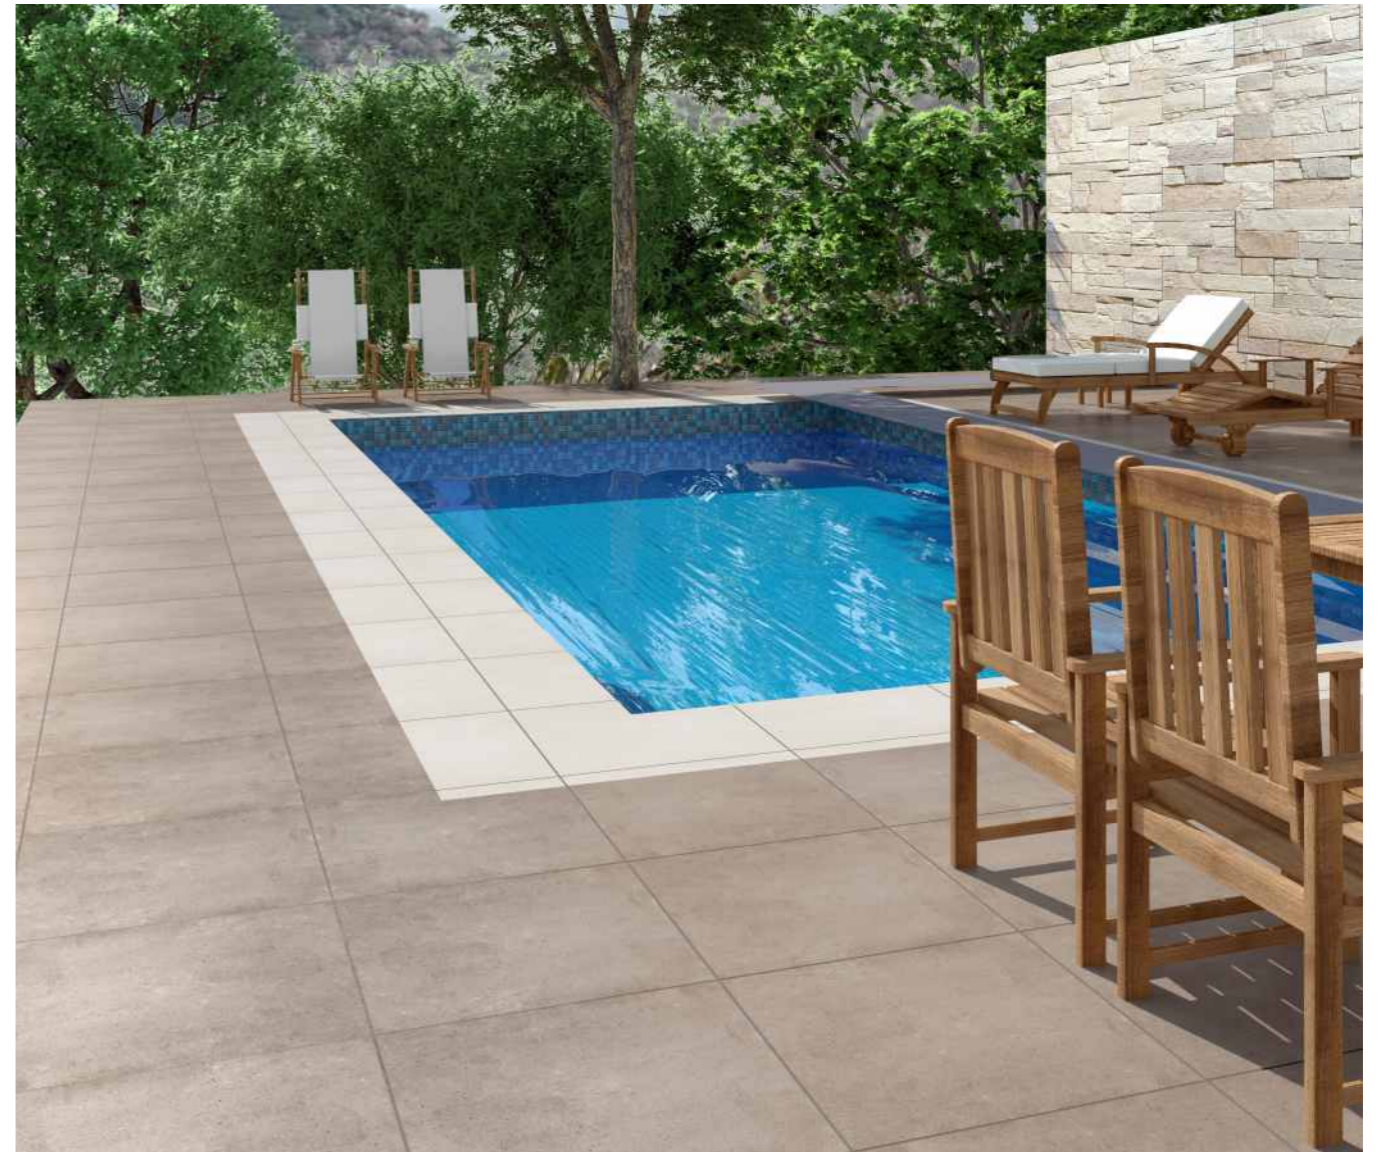


MATT

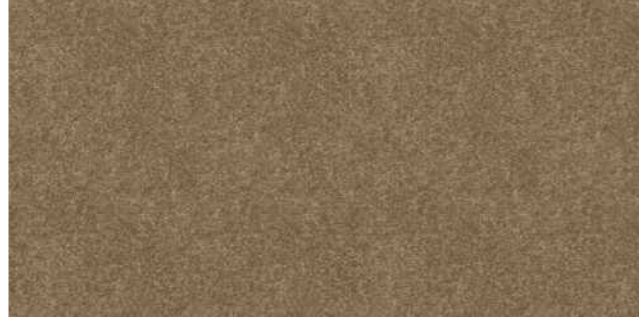


Ravena Camel

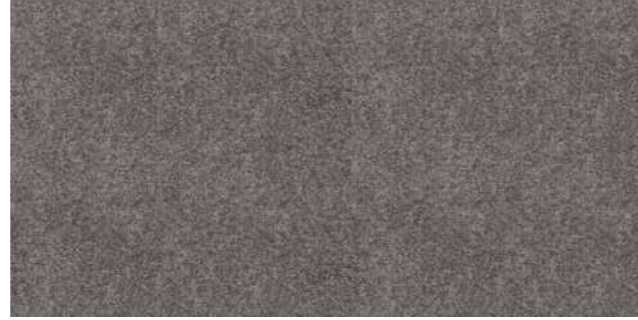

Ravena Gris

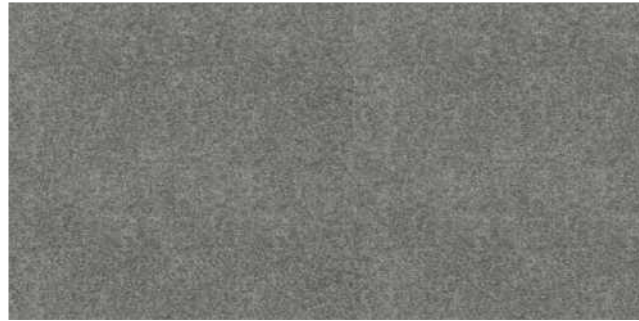

Ravena Marfil

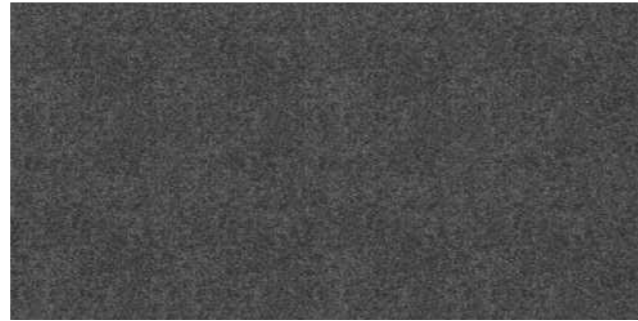

Ravena Nero



MATT



Tango Naranja



Tango Beige



Habitat Ocre






GLOSSY



Travertino Crystal Gold




Dyna Pearl

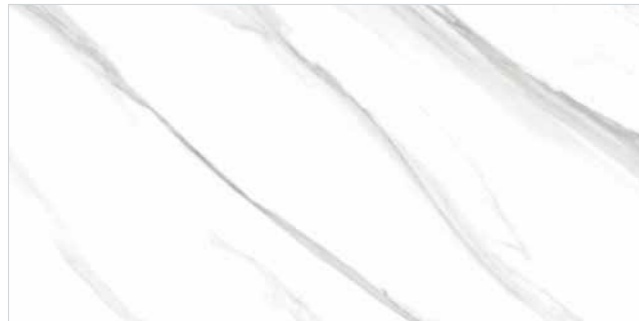

Statuario New



Venus Bianco



Glossy Bianco

	CHARACTERISTIC	STANDARD AS PER ISO-15008/ EN14411 GROUP BIa	MEAN VALUE OF QUTONE VITRIFIED TILES	TEST METHOD
<b>A.</b>	<b>Regulatory Properties</b>			
	Deviation In Length & Width	±0.5%	±0.2%	ISO-10545-2
	Deviation In Thickness	±5.0%	±4.0%	ISO-10545-2
	Straightness Of Sides	±0.5%	±0.1%	ISO-10545-2
	Rectangularity	±0.5%	±0.2%	ISO-10545-2
	Surface Flatness (Curvature & Warpage)	±0.5%	±0.2%	ISO-10545-2
	Color Differences	Unaltered	No Change	ISO-10545-16
<b>B.</b>	<b>Structural Properties</b>			
	Water Absorption	≤0.5%	≤0.05%	ISO-10545-3
	Apparent Density	>2.0 gm/cc	>2.28 gm/cc	DIN 51082
<b>C.</b>	<b>Massive Mechanical Properties</b>			
	Flexural Modulus Of Rupture	Min 35N/mm <sup>2</sup>	Min 45 N/mm <sup>2</sup>	ISO-10545-4
	Flexural Breaking Strength	Min 1300 N	Min 7500 N	ISO-10545-4
	Impact Resistance	As Per Manufacturer	Min 0.55	ISO-10545-5
<b>D.</b>	<b>Surface Mechanical Properties</b>			
	Deep Abrasion Resistance	Max 175mm <sup>3</sup>	N.A.	ISO-10545-6
	Moh's Hardness	Min 6	7	EN-101
	Surface Abrasion Resistance	As per mfg	Min. Class 4	ISO-10545-7
<b>E.</b>	<b>Thermo Hydrometric Properties</b>			
	Frost Resistance	No Damage	Frost Proof	ISO-10545-12
	Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
	Moisture Expansion	Nil	Nil	ISO-10545-10
	Thermal Expansion	Max 9.0 X 10 <sup>-6</sup>	Max 6.5 X 10 <sup>-6</sup>	ISO-10545-8
	Crazing Resistance	As per mfg.	Min. 10 cycle	ISO-10545-11
<b>F.</b>	<b>Chemical Properties</b>			
	Chemical Resistance	No Damage	No Damage	ISO-10545-13
	Stain Resistance	Resistant	Resistant	ISO-10545-14
<b>F.</b>	<b>Safety Properties</b>			
	Slip Resistance (Friction Co Efficient)	> 0.40	>0.40	ISO-10545-17

Note: Min. 4mm Spacer is Mandatory for 20mm Thick Tiles

Packing Detail:

Dimension (mm)	Tile / Box (nos.)	Coverage / Box (Sq.ft.)	Coverage / Box (Sq.mtrs.)	Weight / Box (Kgs. Aprox)
600x1200	2	15.5	1.44	64
600x600	2	7.75	0.72	32

Note: Colors shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without any notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.