

PARKER TILES PVT. LTD.

CORPORATE OFFICE:

702, Iscon Elegance, S.G. Highway, Ahmedabad 380 015, Gujarat, India. Ph.: +91 90999 05252 / 05353 | Fax: +91 79 6616 8989


DISPLAY SHOWROOM:

107 - 108, Oreva Land Mark, Nr. Shiv Ajanta Hotel, Morbi 363 646, Gujarat, India Ph.: +91 90999 88251

MANUFACTURING UNIT:

Surendranagar - Rajkot highway, Opp. Jasapar Bus Stop, Nr. Muli Village 363 510, Gujarat, India. Ph.: +91 2756 233 185, 90999 93848

Email: info@soltiles.in Web : www.soltiles.in

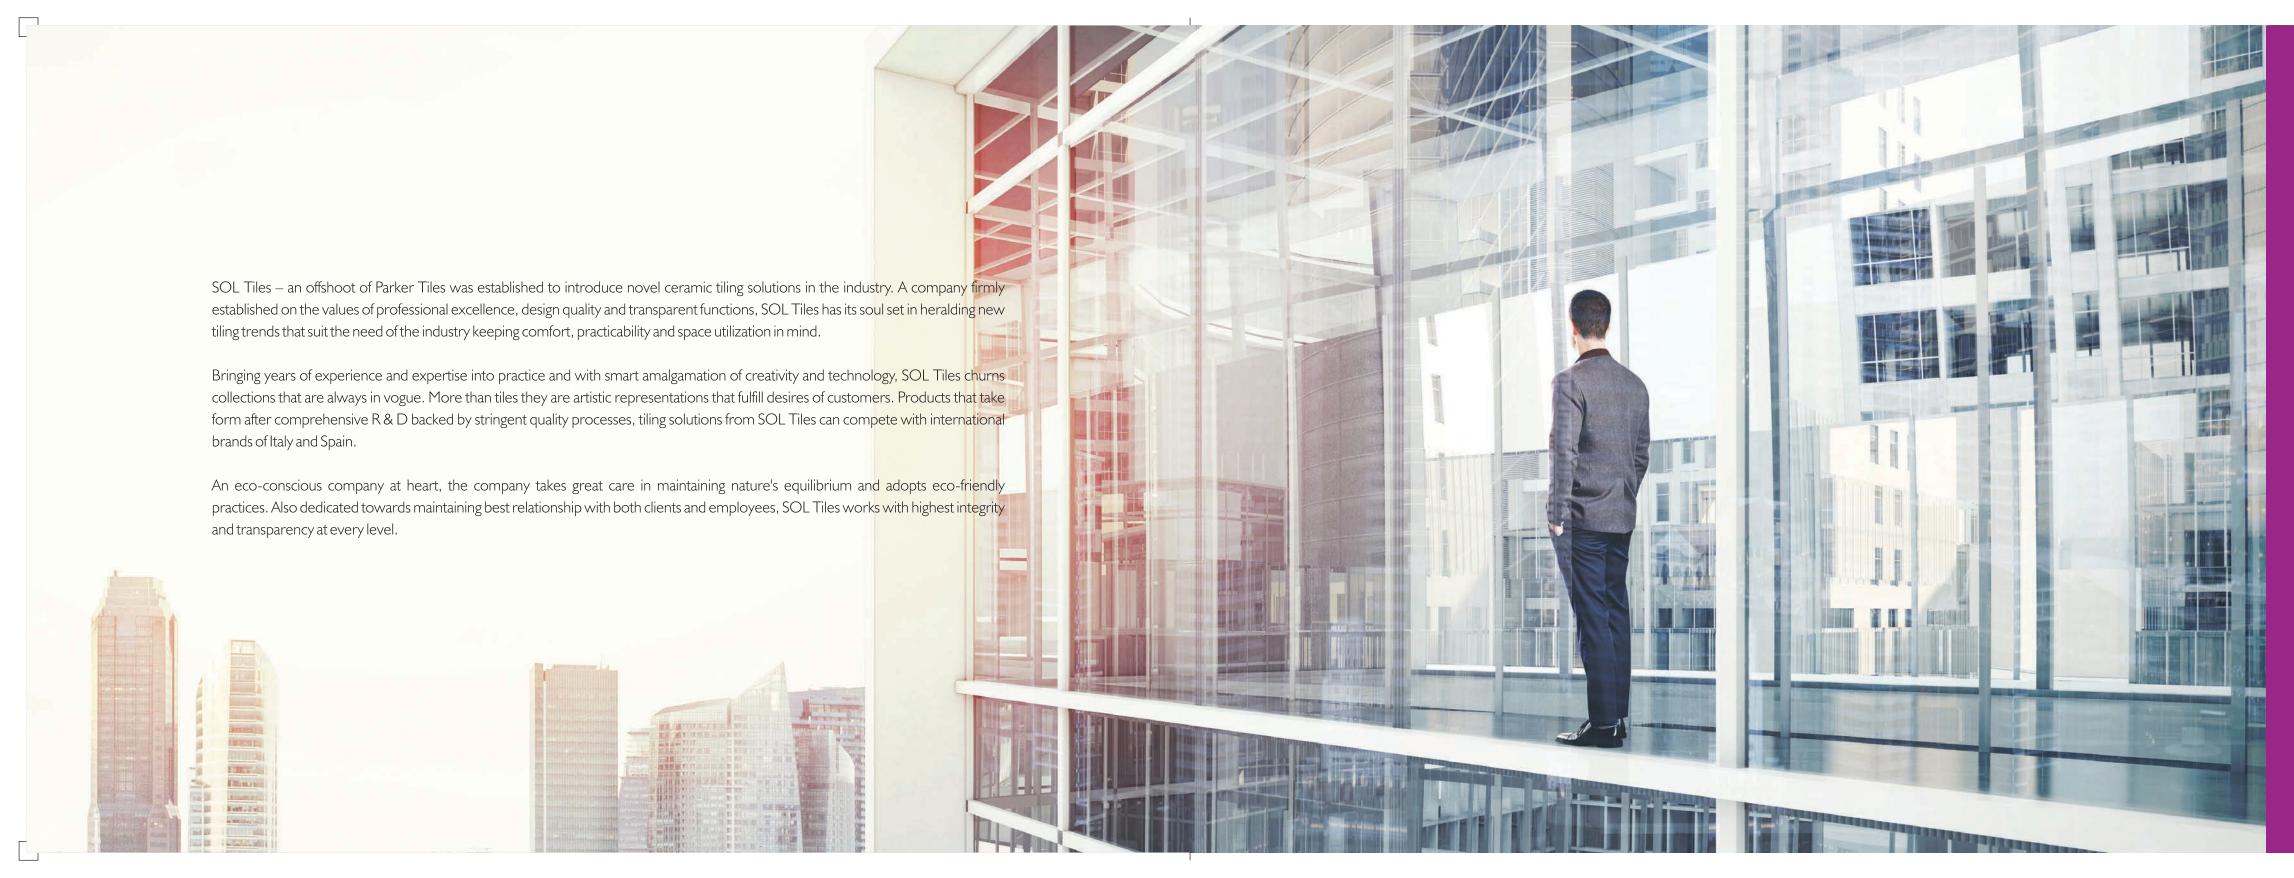





Surface depths are created in aesthetic manner so as to improve design looks and perceptive minds can clearly see a work of art in it's majestic glory.



High Depth Tiles

Surface depressions are deliberately created to create an illusion of surface contrast.




3-D Look

Such surface undulations created a realistic 3-D look that makes tile stand out from the rest.



Color Contrast

Each and every surface segment is colored in a manner that contrasts becomes apparent, yet elegant in its appeal.

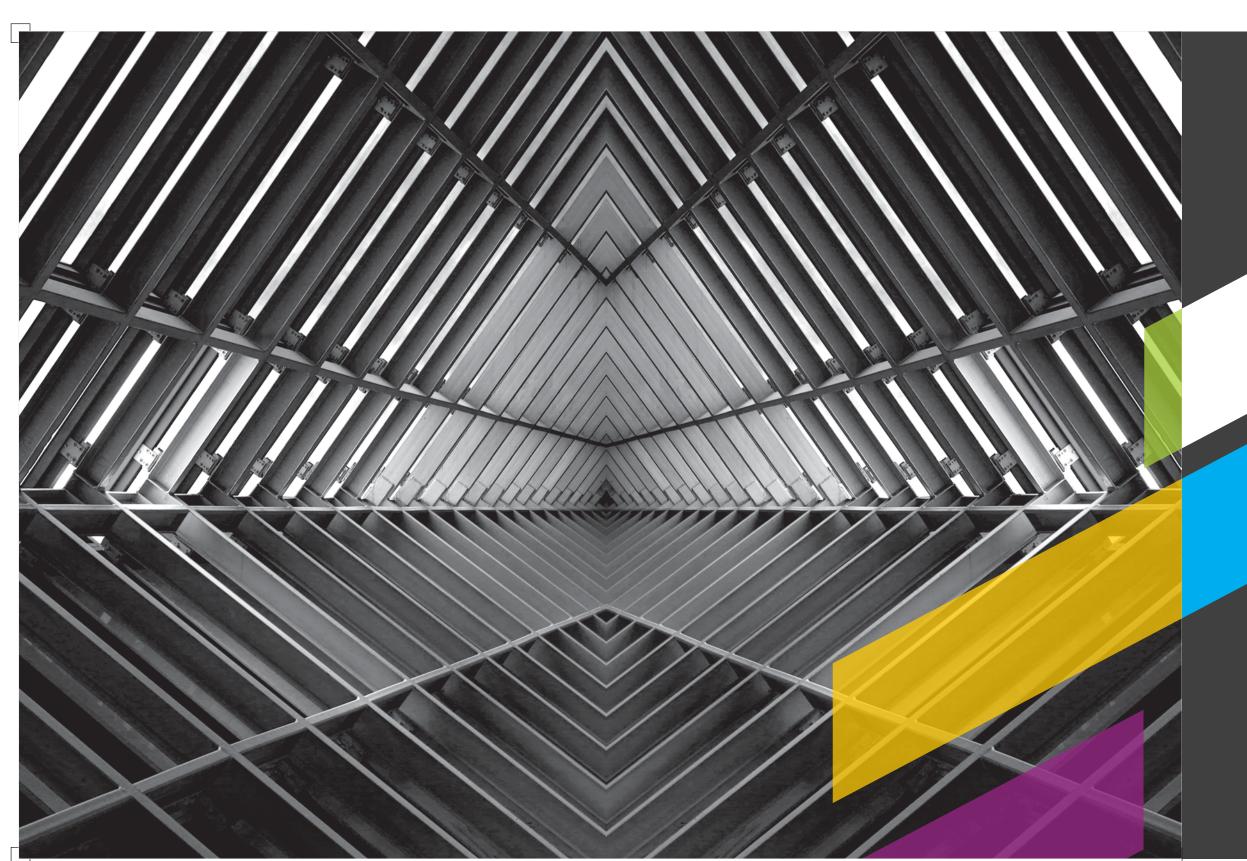

Swar Finnish 600x300mm


Defying conventions Ceramics have taken a great leap forward with intricate Technological progression moves forward rowards higher color technological progression moves for the color technologi density and realistic patterns. Indeed, with passage of time,

design perfectionism will continue to scale new heights.







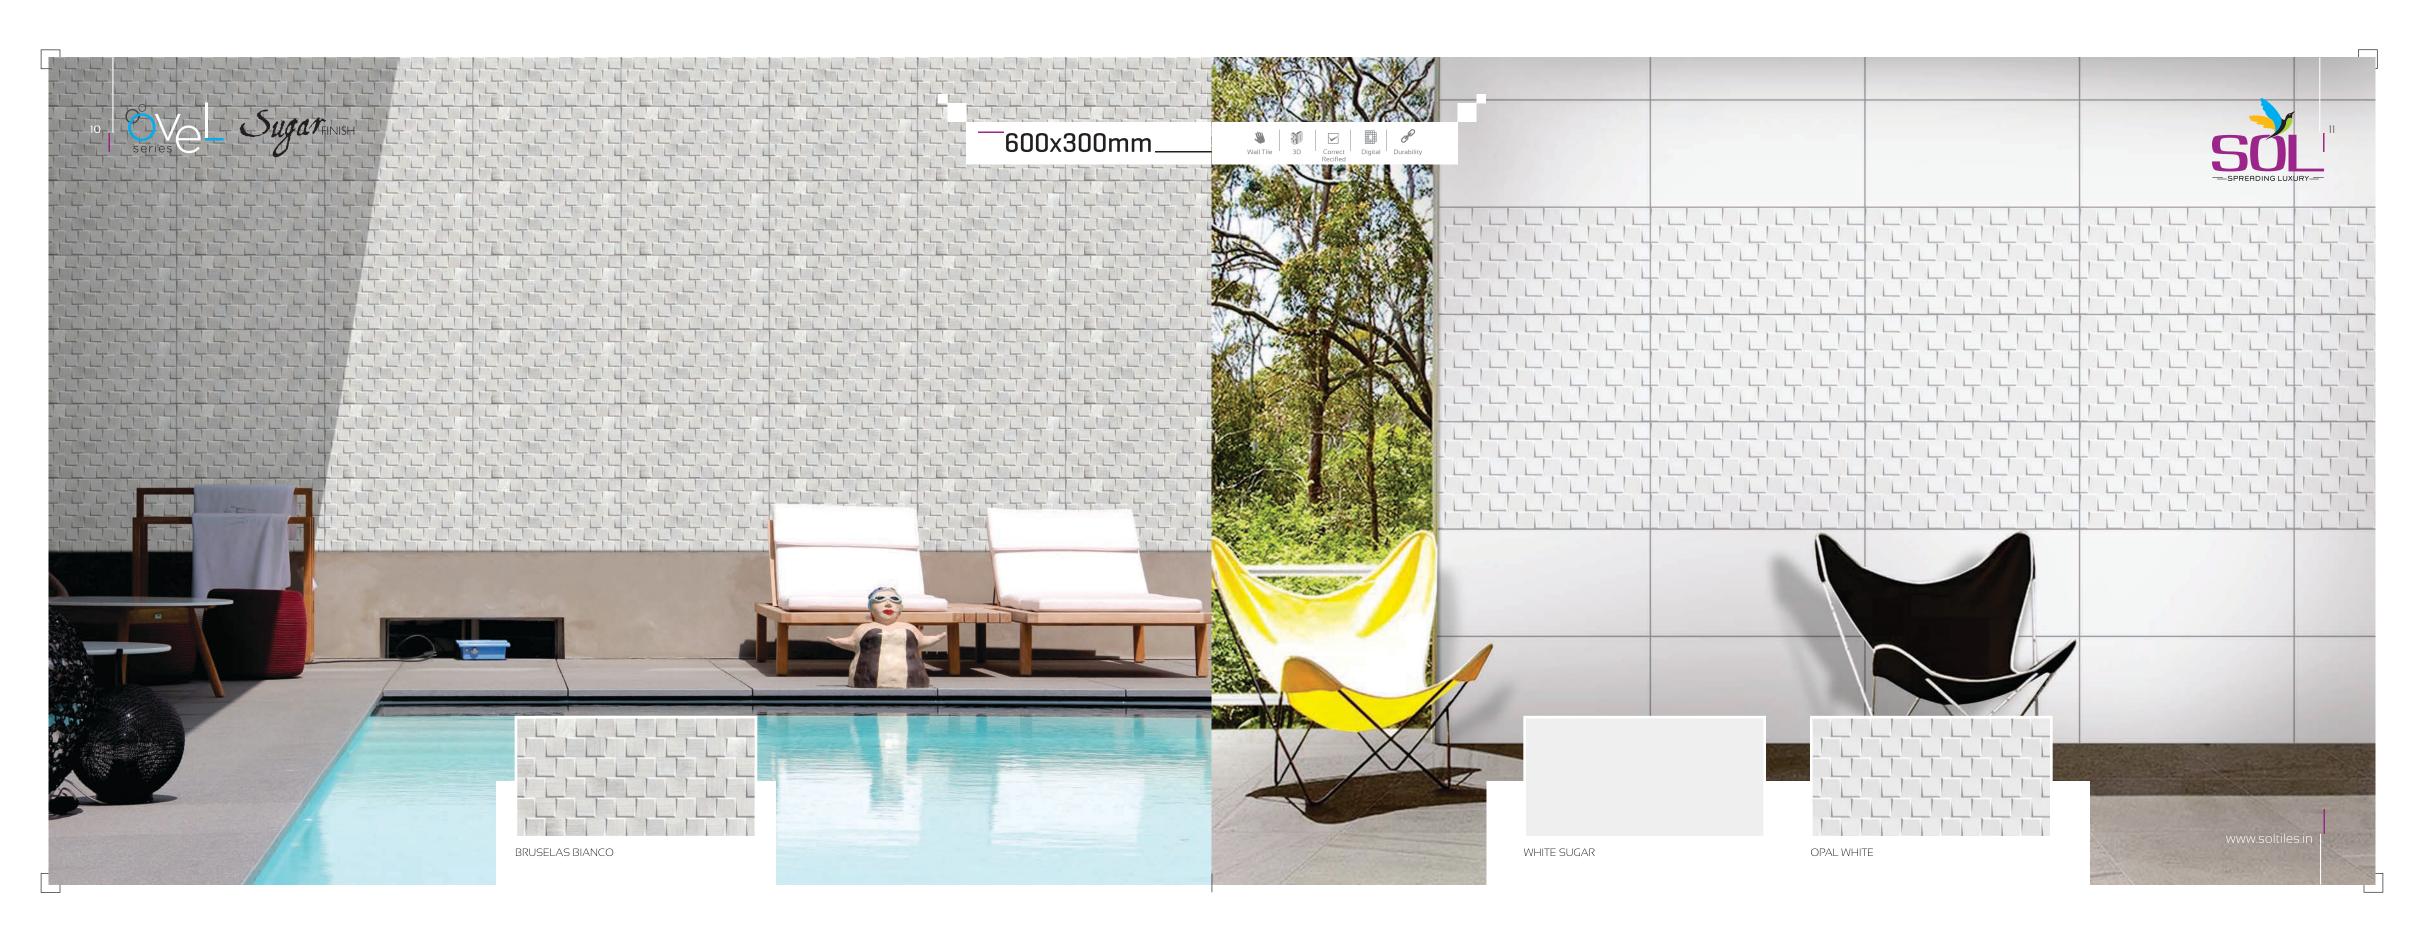




Surface Realism At It's Best Surfaces are sugar finish and coarsened in a manner that depicts realistic Patterns and Variety. As also, it improves surface grip and resultant friction. With curch sciences resultant friction. With such finish, tiles gleam brightly and clearly, let possess hardness such finish.


yet possess hardness & abrasion resistance.








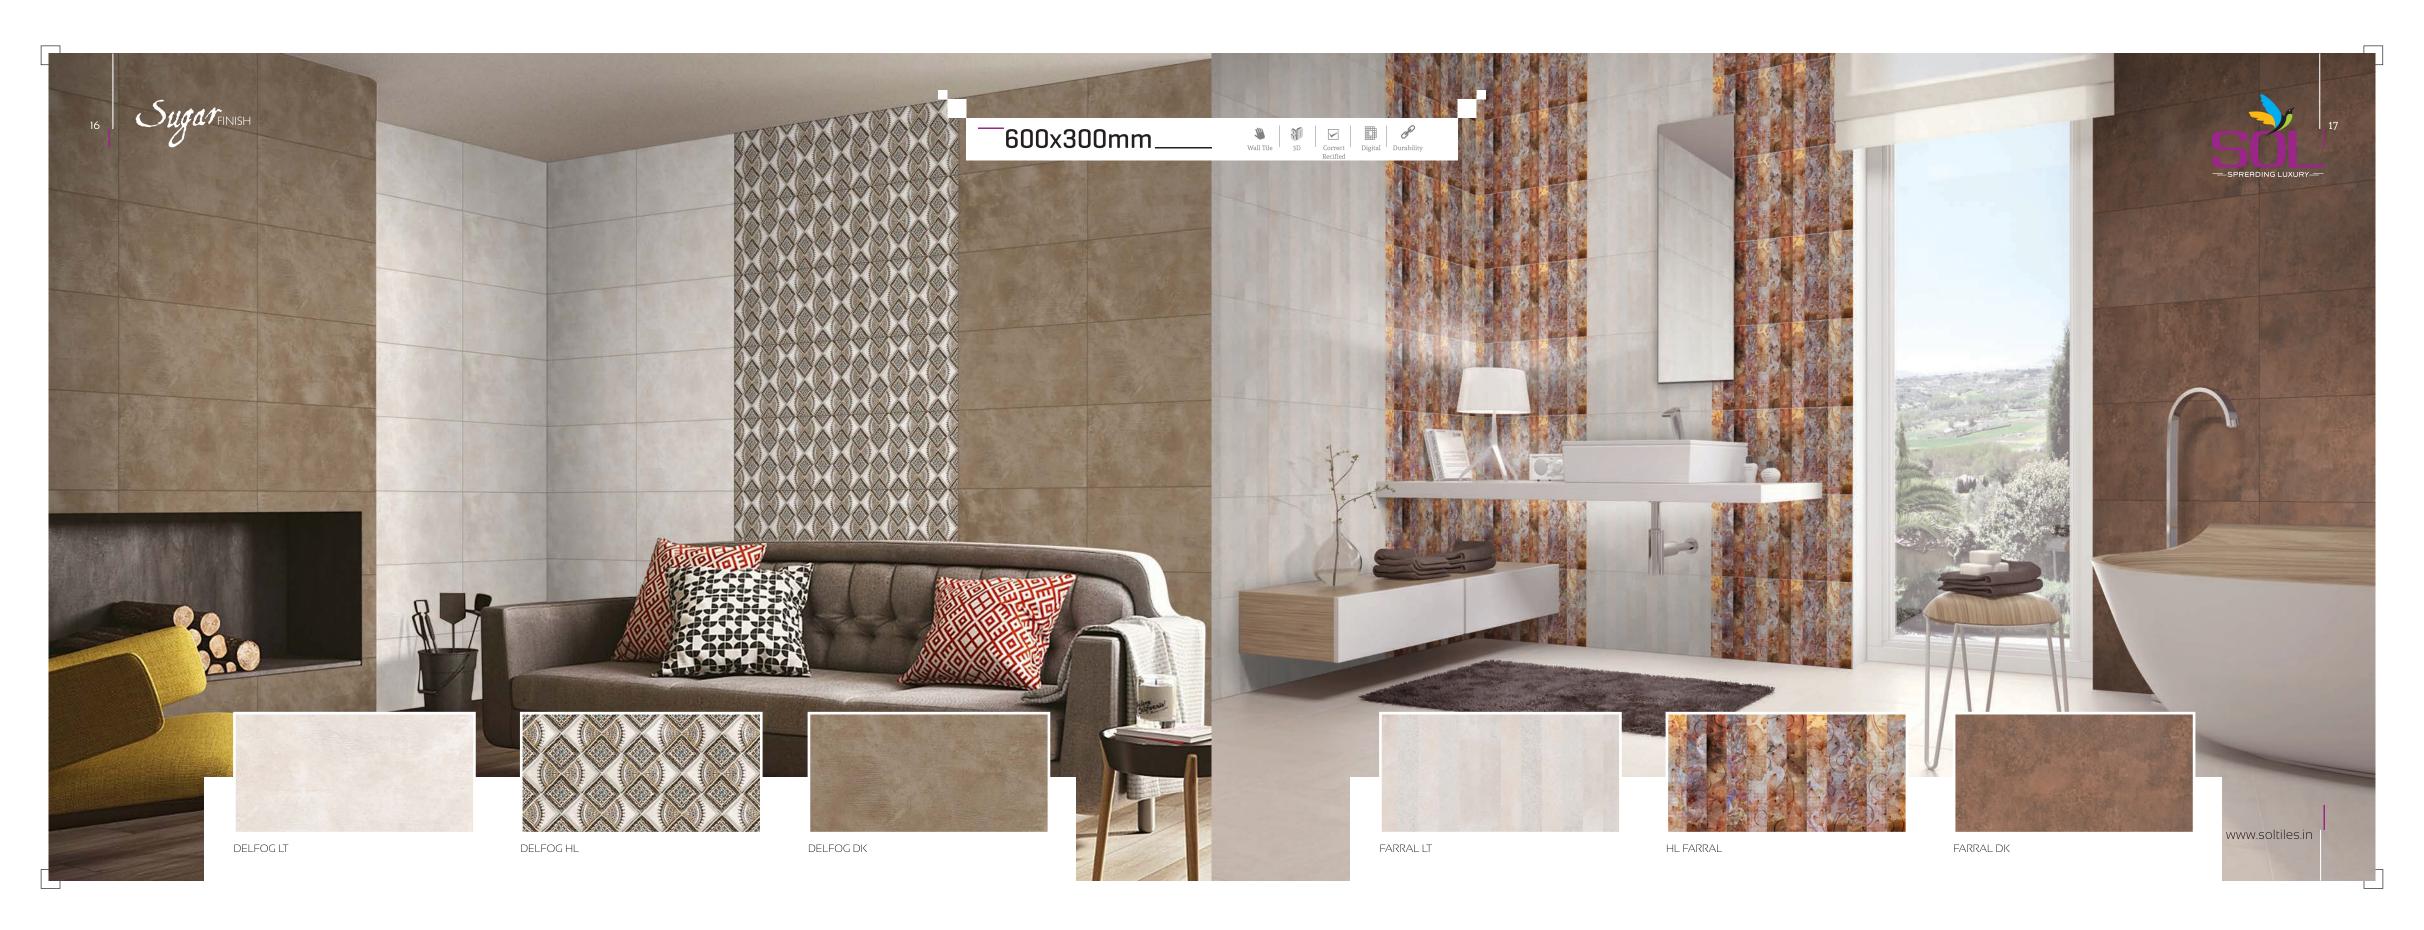

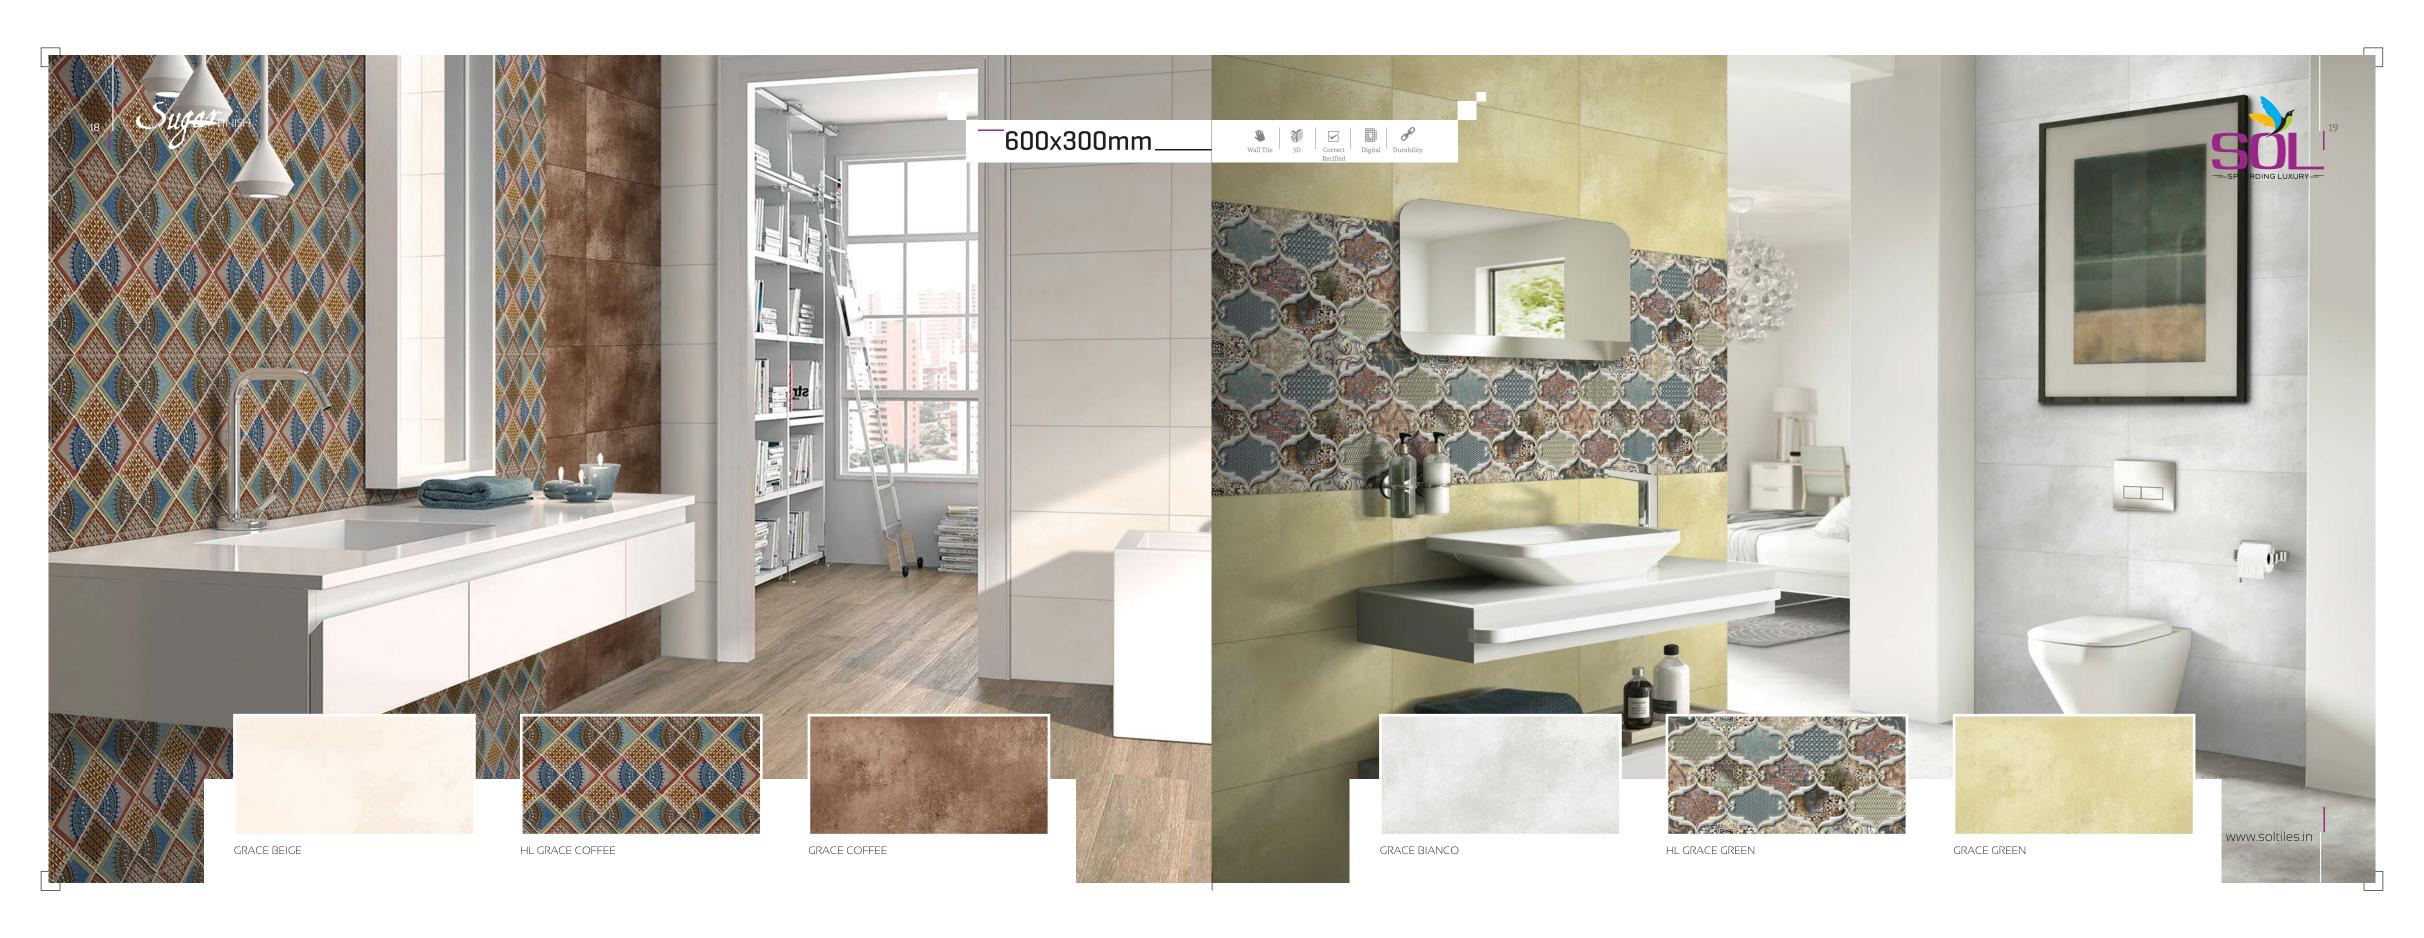






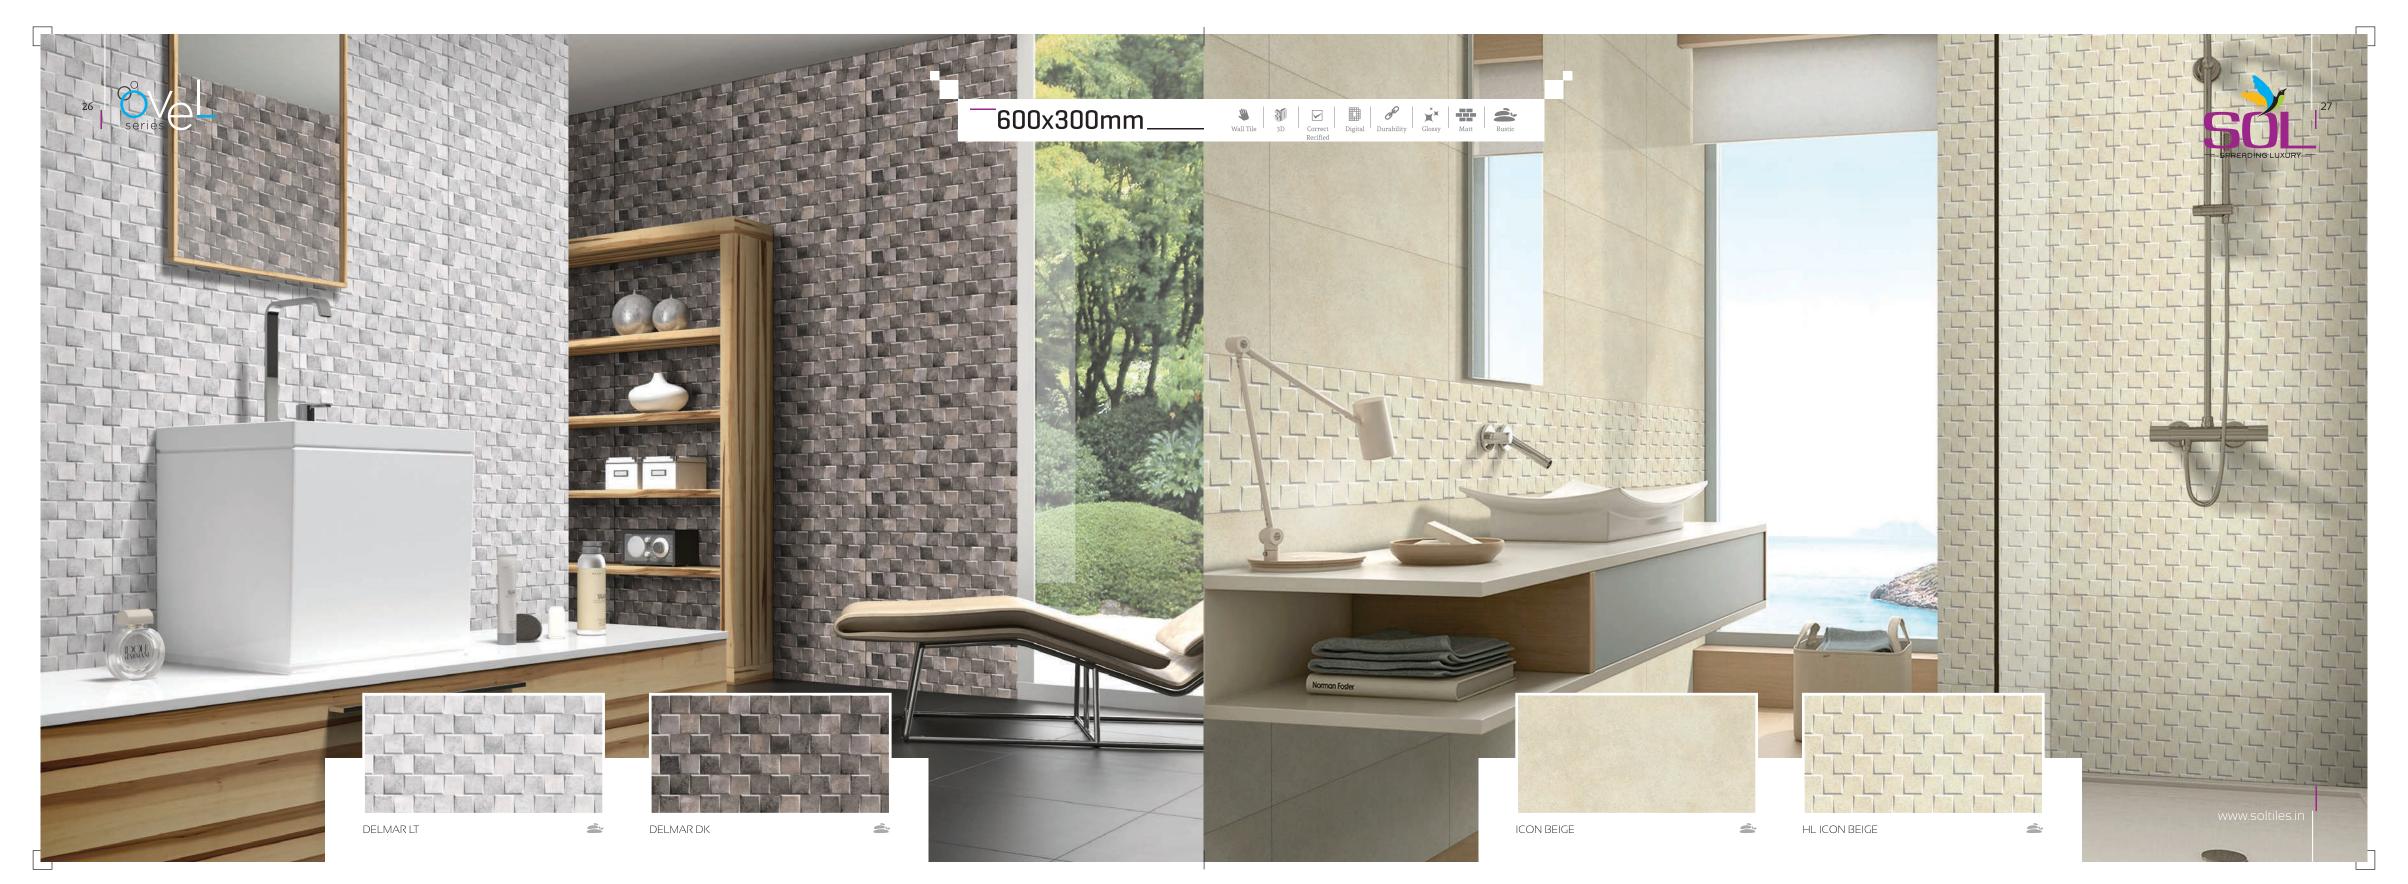


RUSTIC UV ON TILES


RUSTIC UV ON TILES

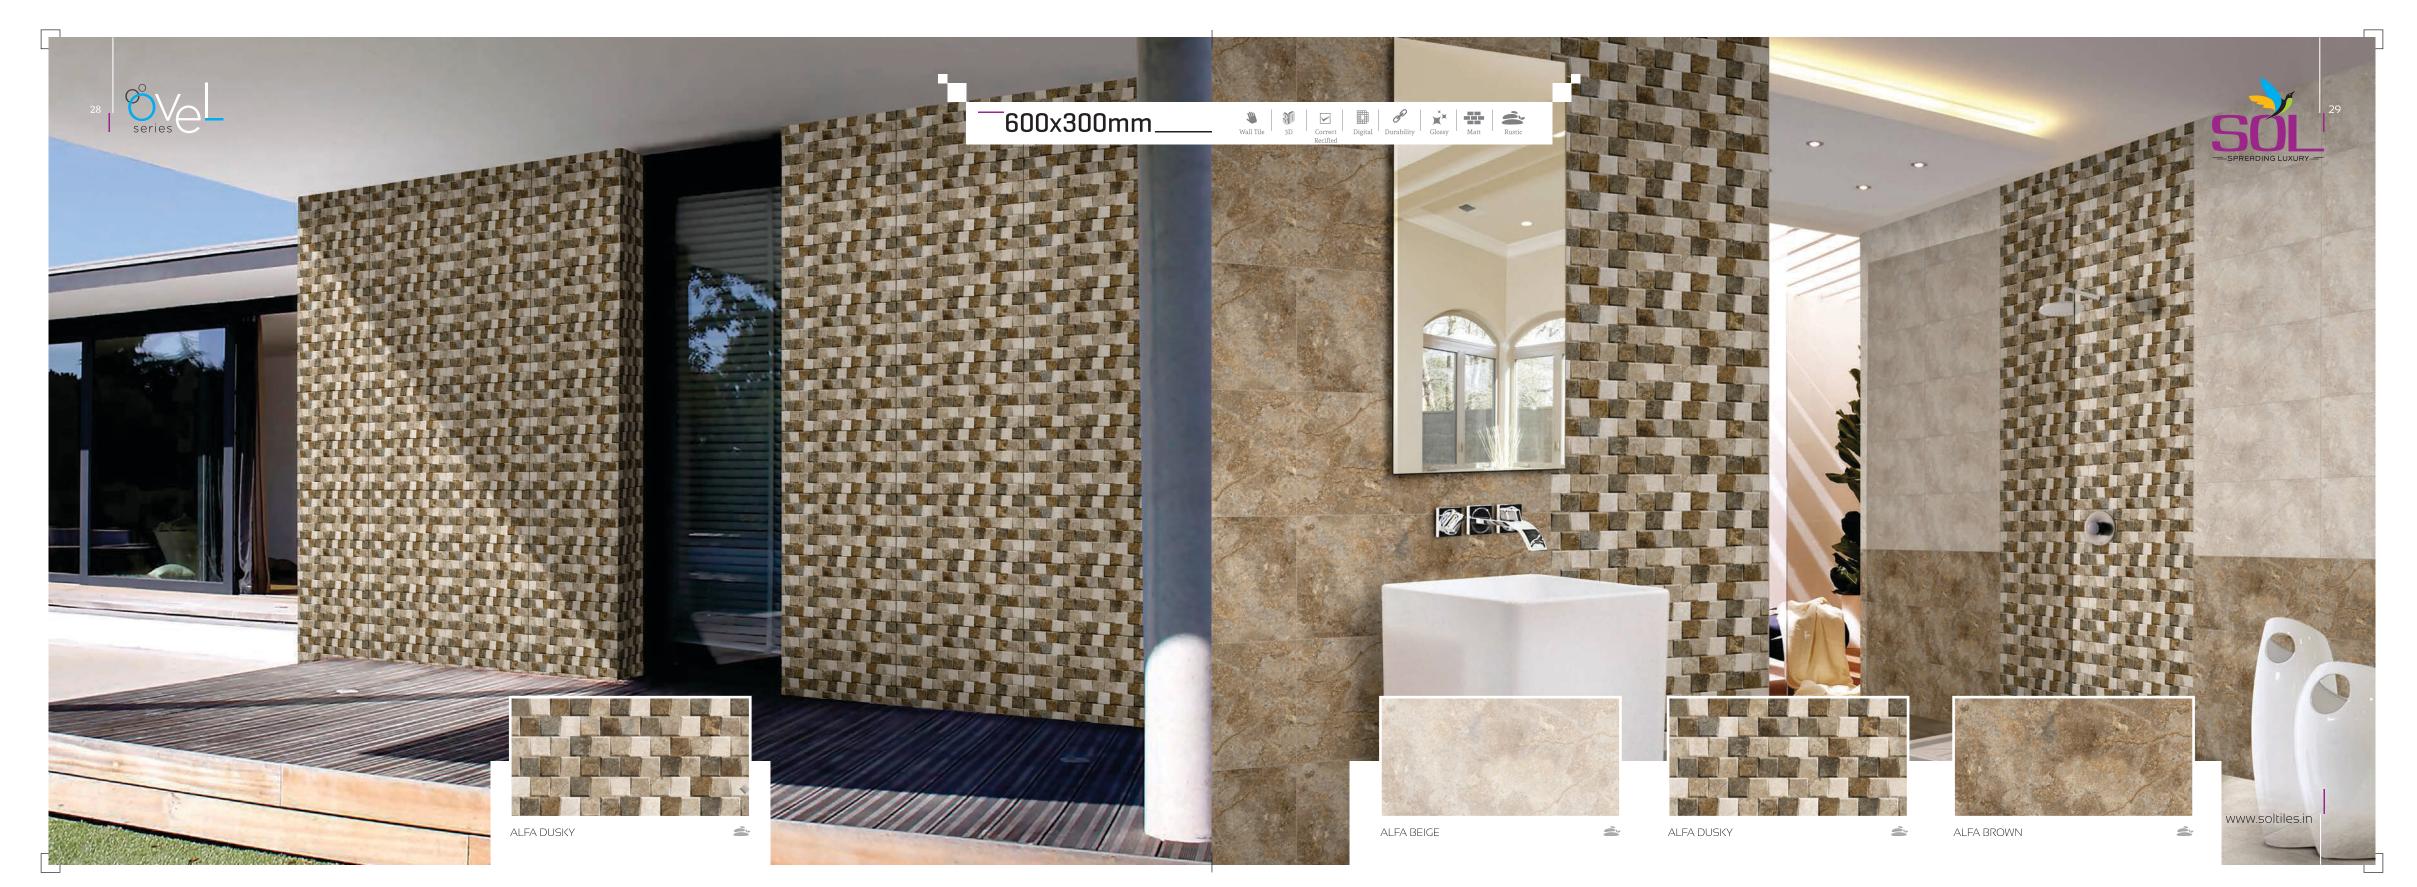



RUSTIC UV ON TILES

RUSTIC UV ON TILES

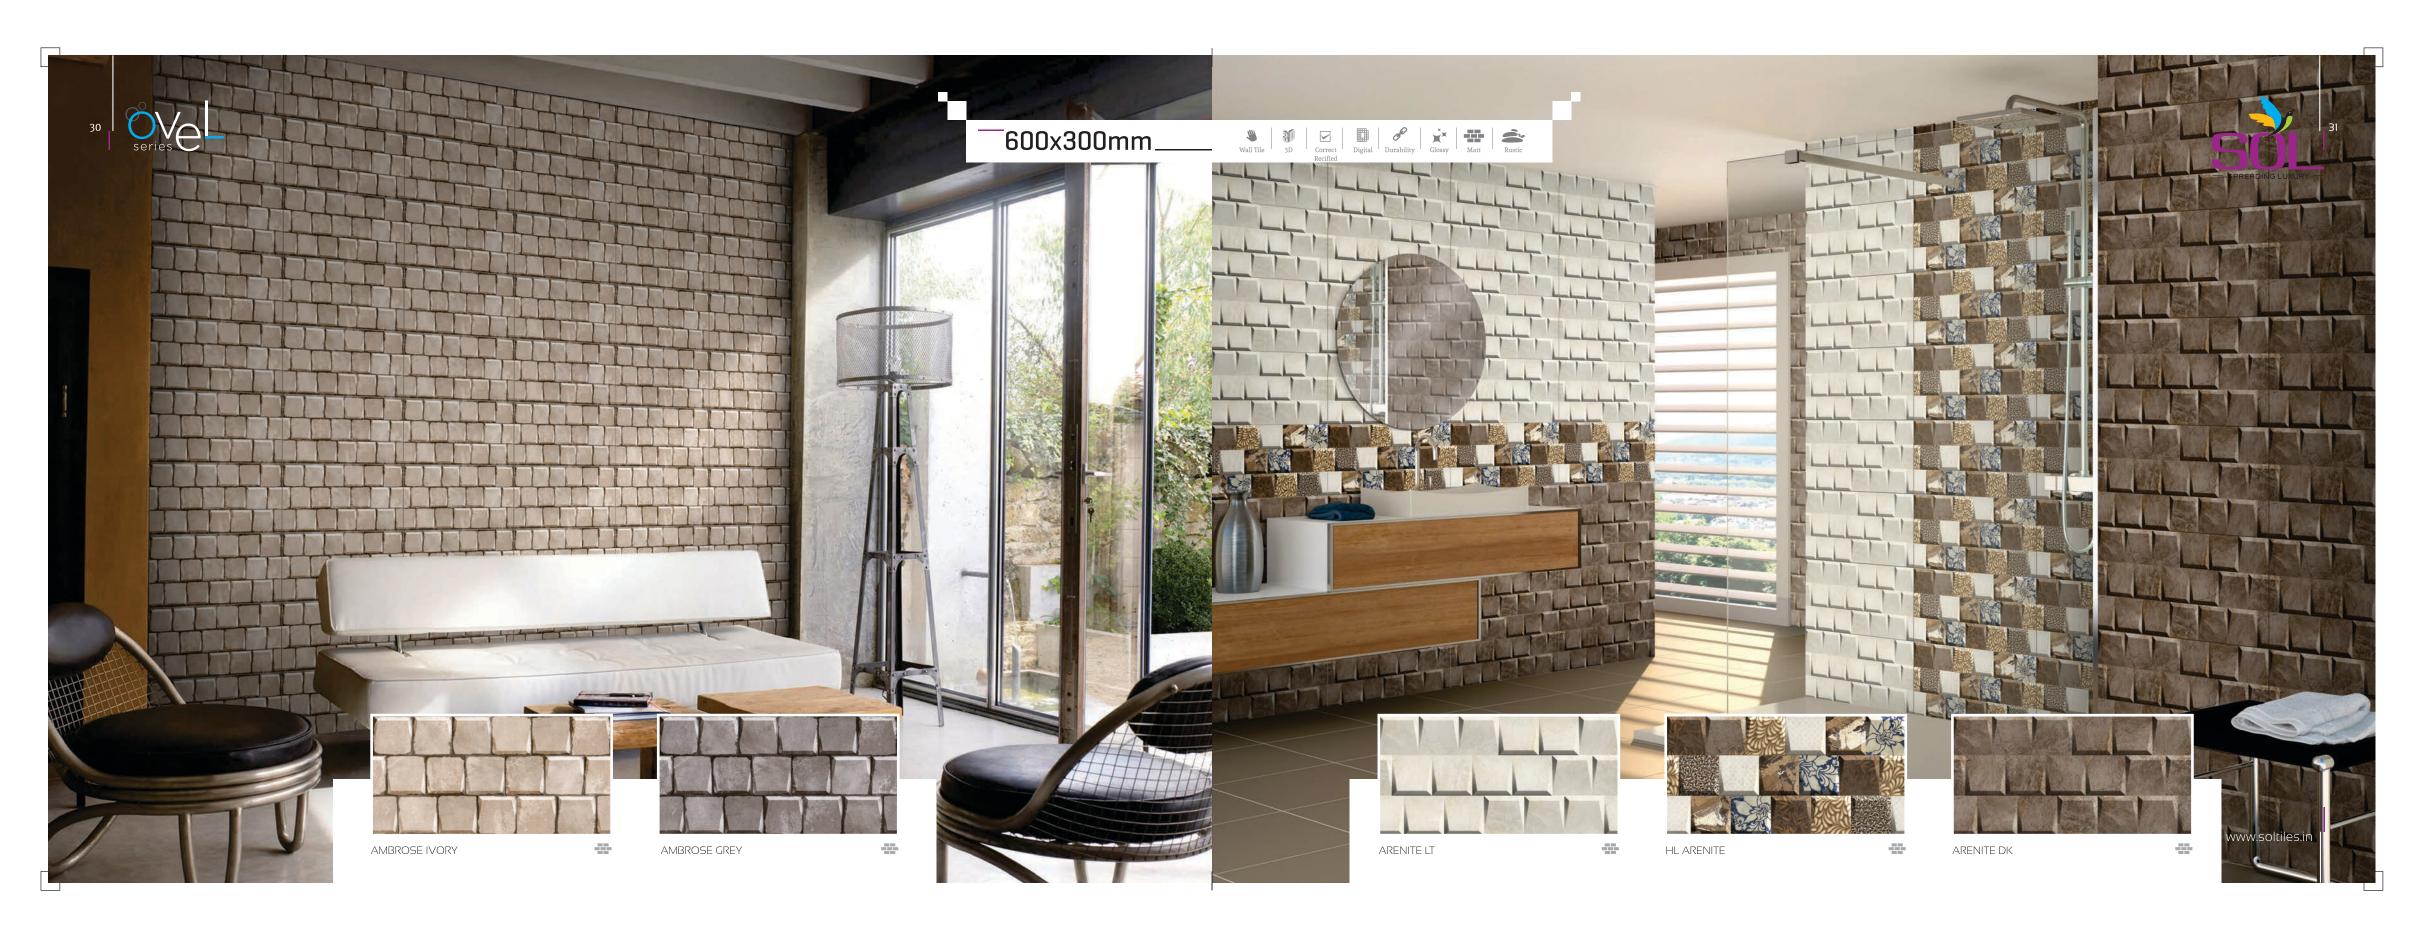

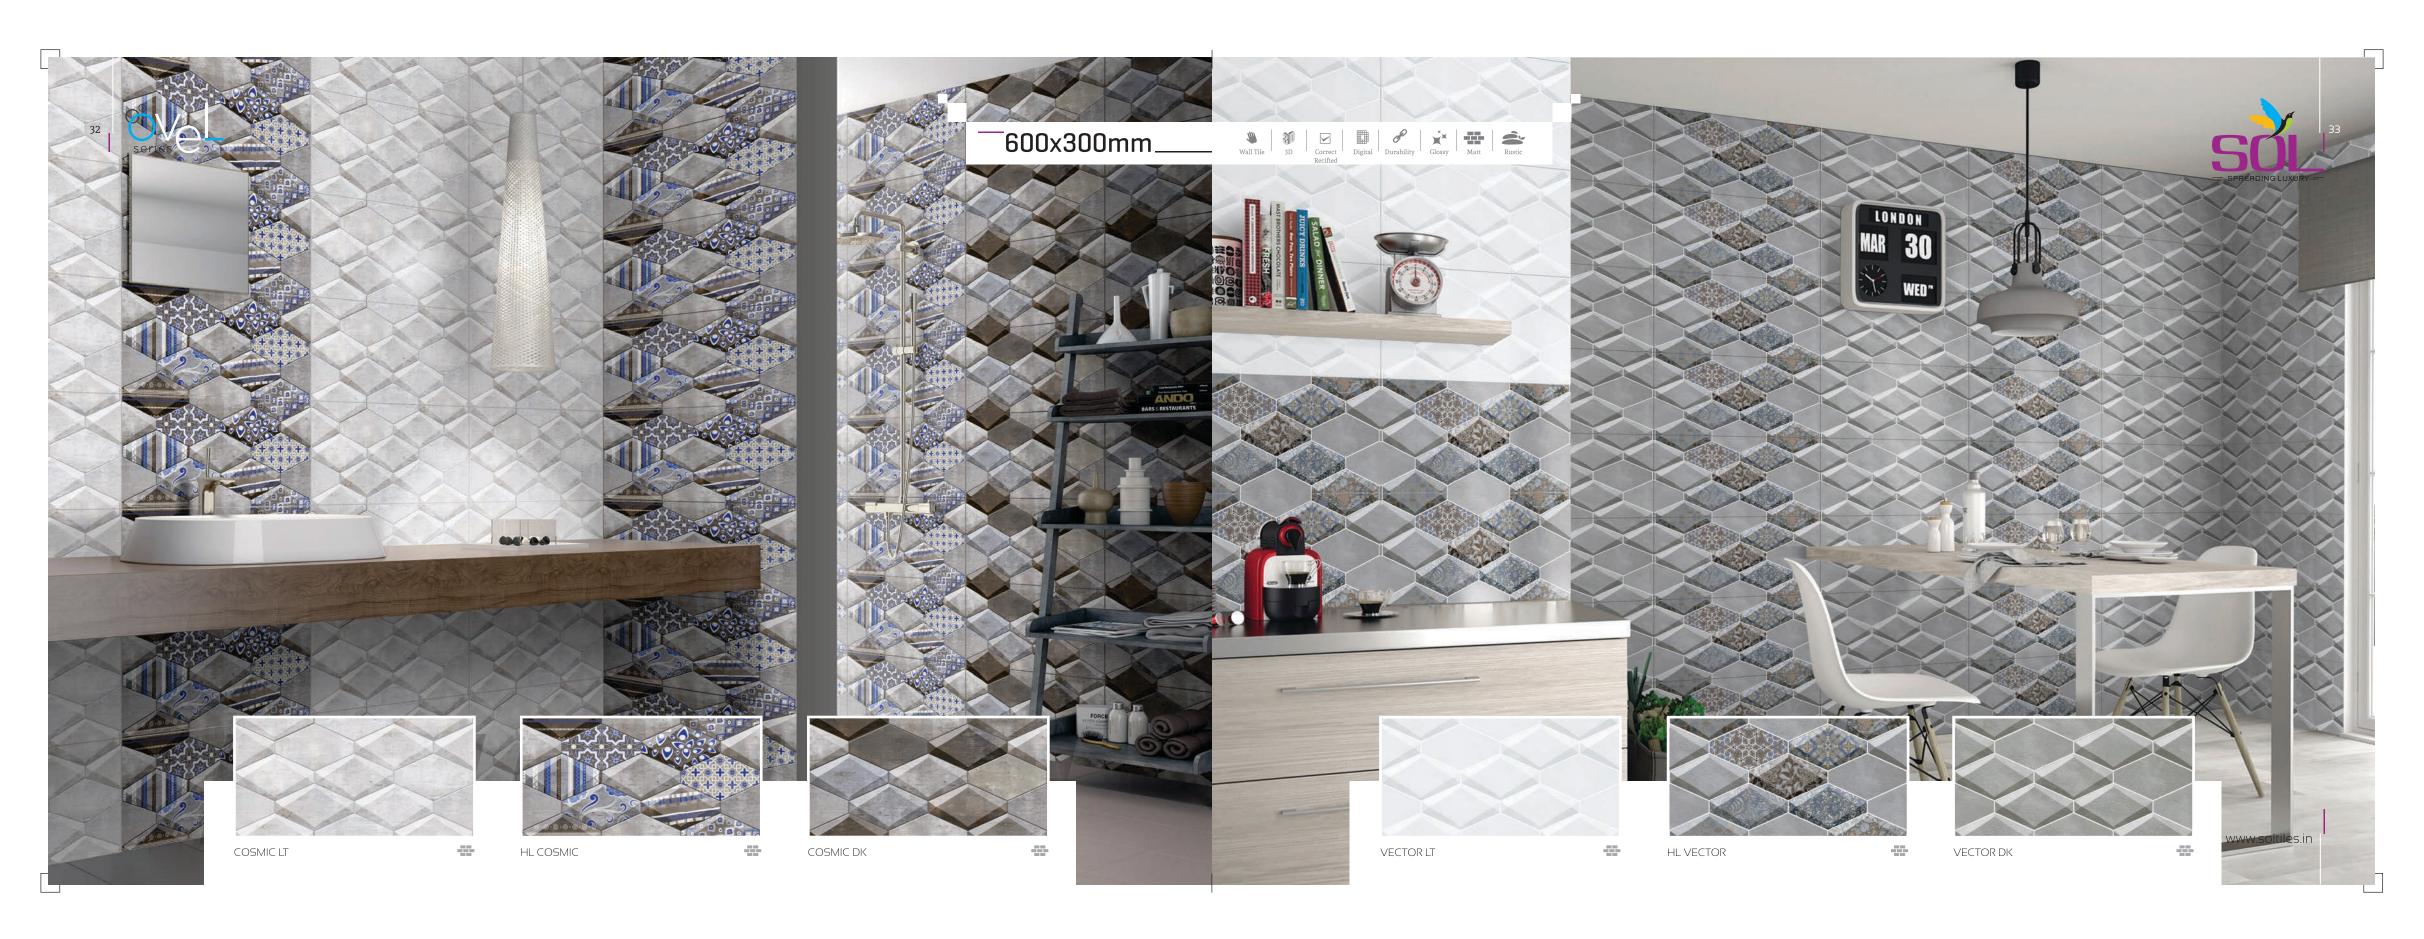

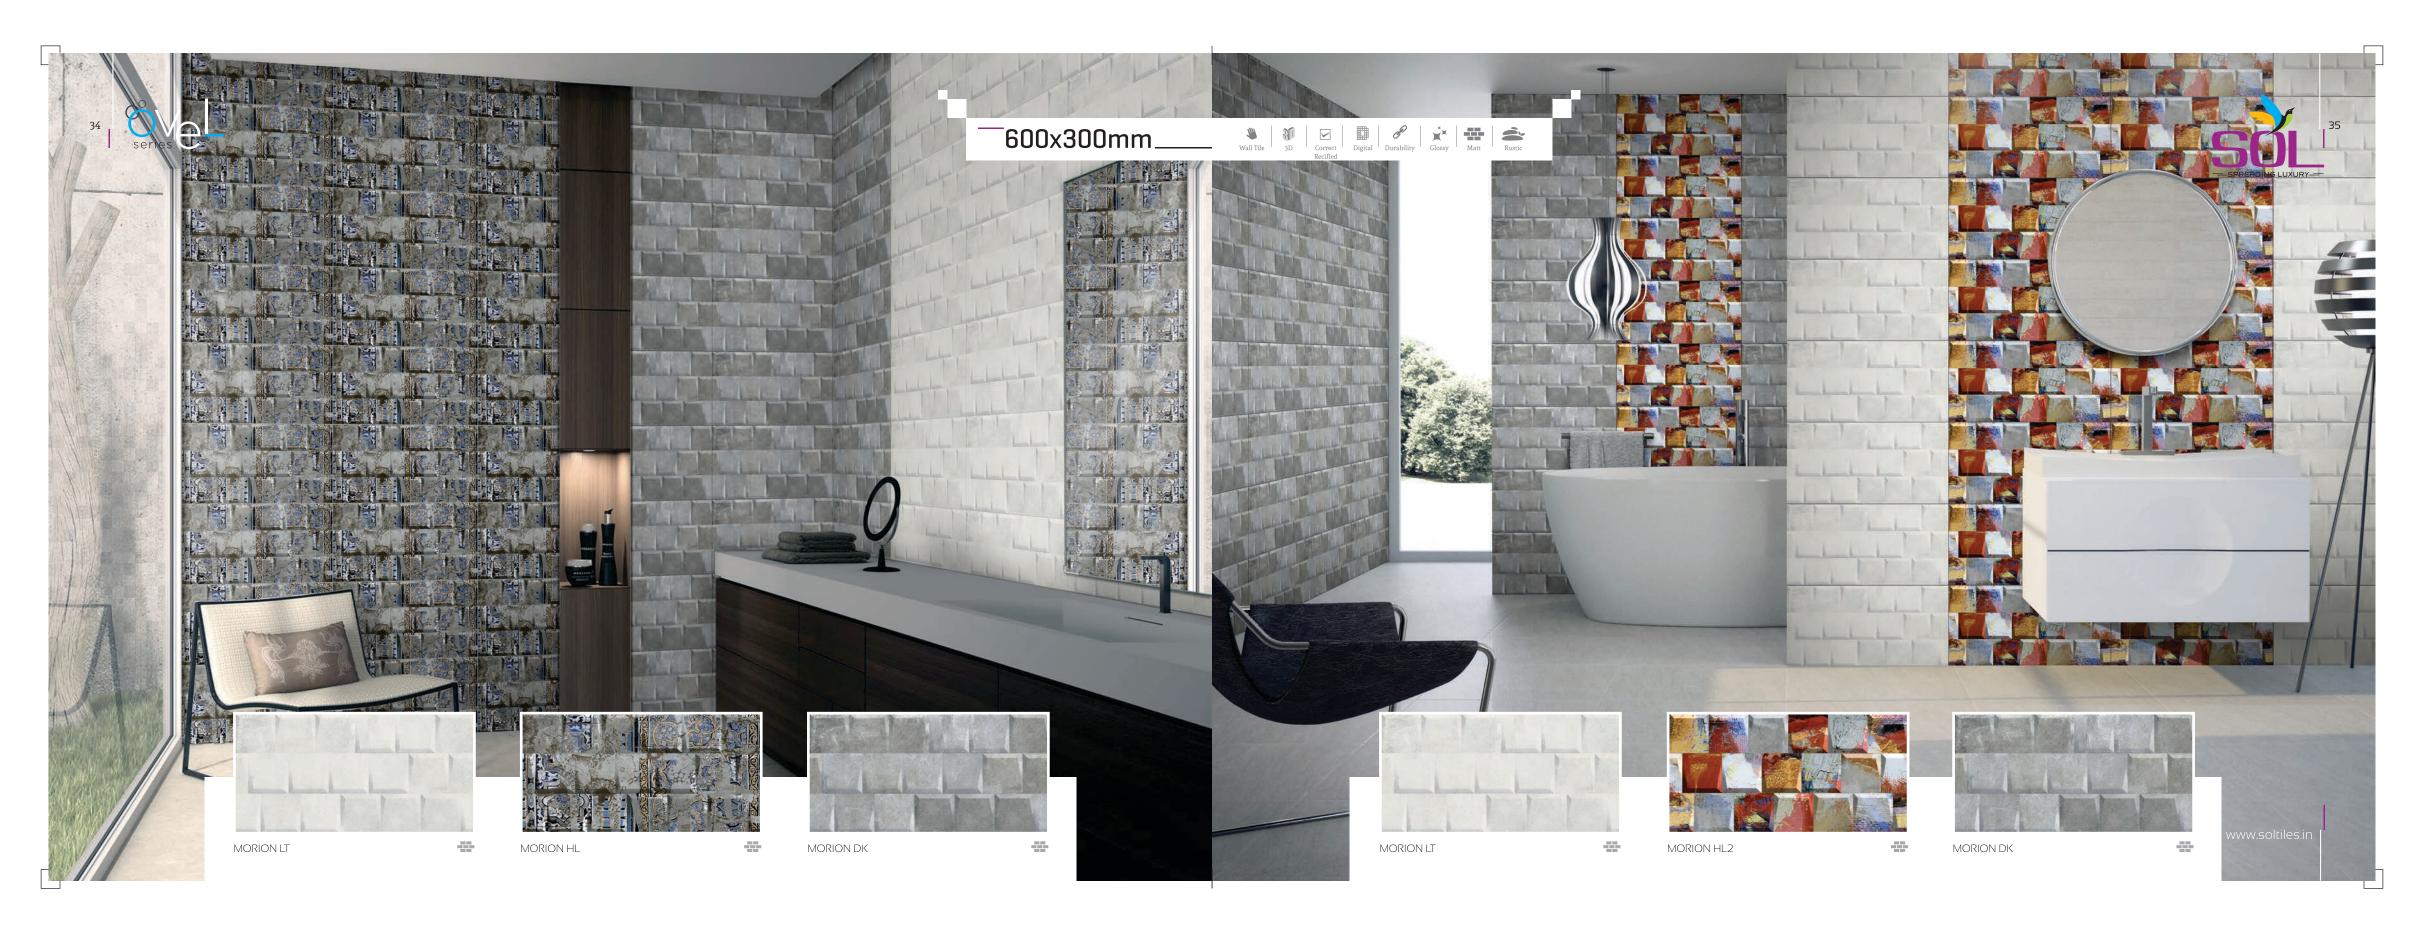

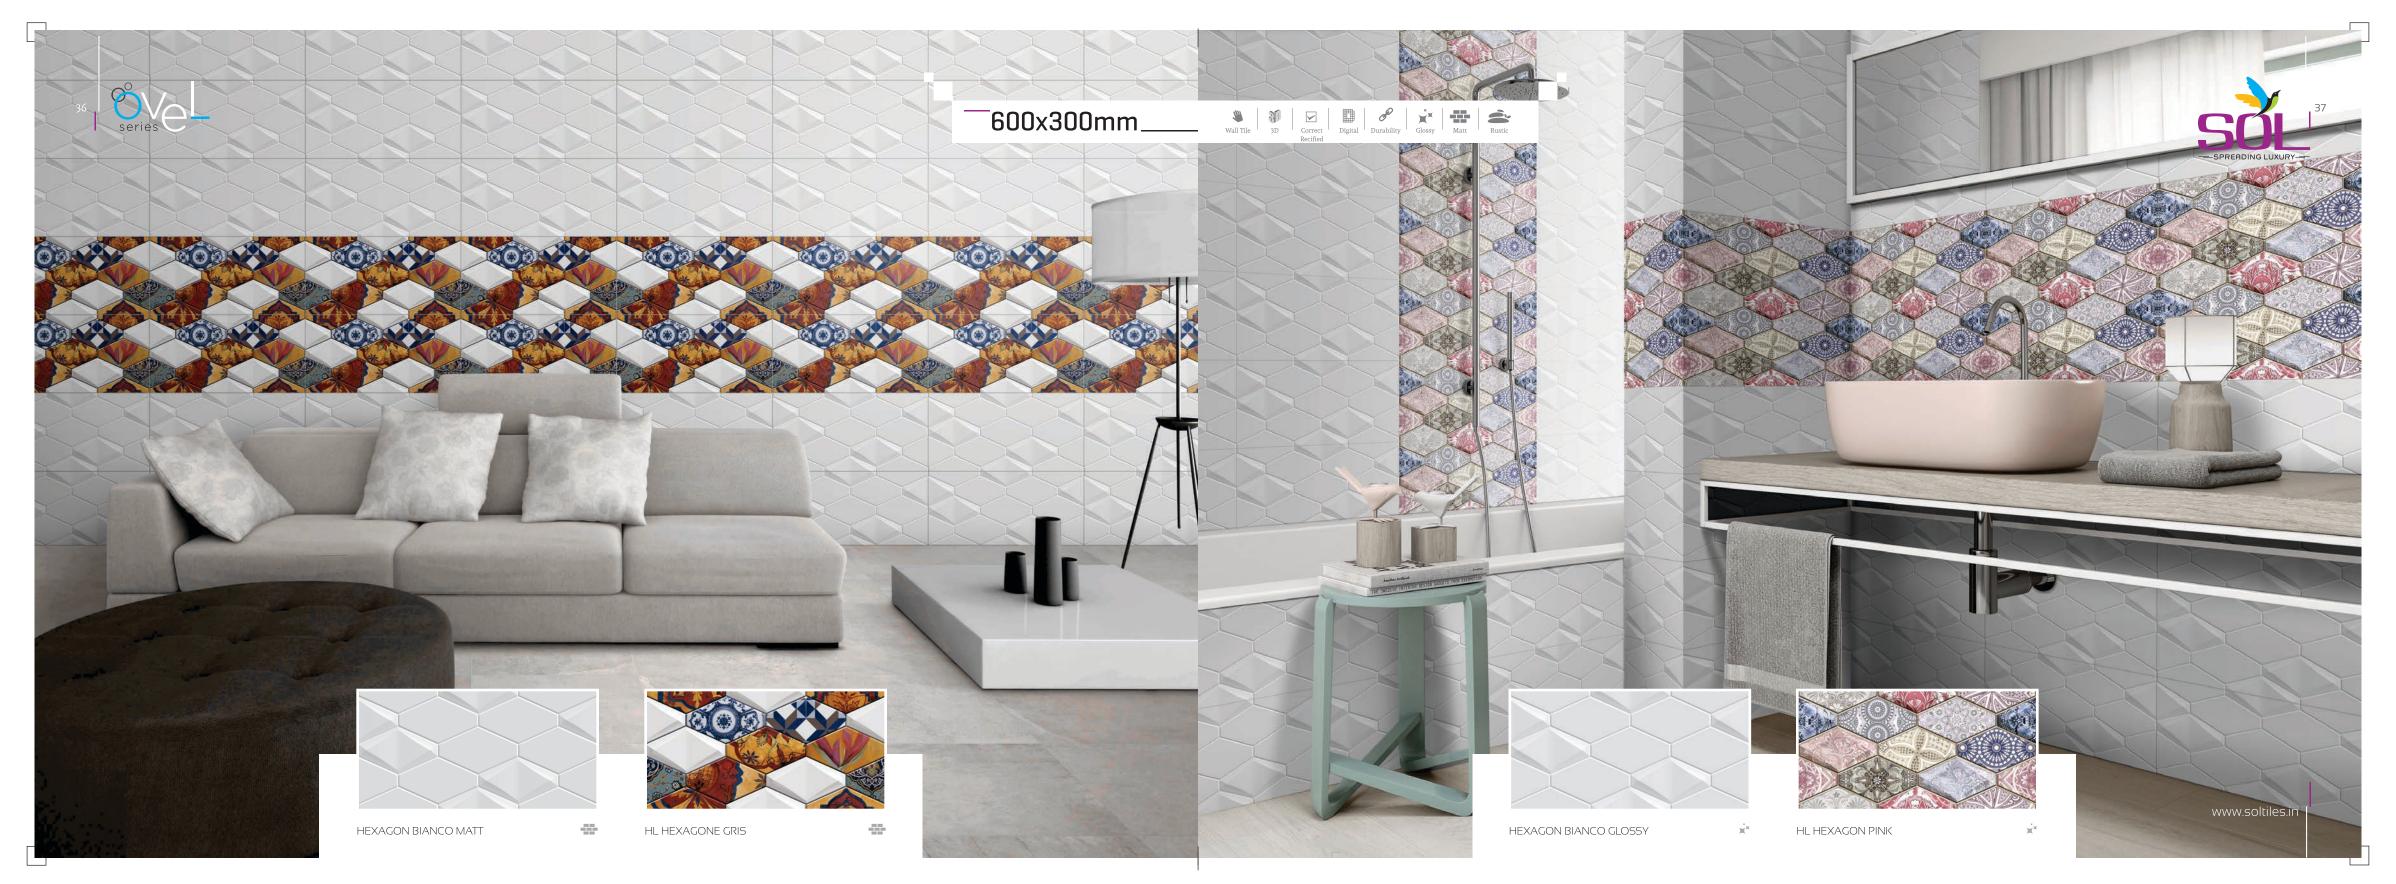

Domestic

SIZE	NO. OF TILES/BOX	WEIGHT KG.	COVERAGE SQ. FT.	COVERAGE SQ. MTR.	PACKING
Ovel + Sugar Series	7	20.50	13.56	1.25	Corrugated Box
Ovel Series	7	20.50	13.56	1.25	Corrugated Box
Sugar Series	8	23.50	15.50	1.44	Corrugated Box

Export

SIZE	NO. OF TILES/BOX	WEIGHT KG.	COVERAGE SQ. FT.	COVERAGE SQ. MTR.	PACKING
Ovel + Sugar Series	5	14.50	9.65	0.90	Corrugated Box
Ovel Series	5	14.50	9.65	0.90	Corrugated Box
Sugar Series	5	14.50	9.65	0.90	Corrugated Box

Applications





















College











Workshop









School/ Religious



ISO STANDARD SPECIFICATION ACTUAL VALUE | METHOD OF TESTING Sr. No. | CHARACTERISTICS | Length & Width ±0.5% ±0.2% ISO-10545-2 Thickness ISO-10545-2 ±5% ±3% Straightness of sides ±0.3% ±0.15% ISO-10545-2 Rectangularity ±0.5% ISO-10545-2 ±0.2% Surface Flatness ±0.5% ±0.25% ISO-10545-2 Surface Quality ISO-10545-3 >95% >98% Water Absorption >10% ISO-13630 13 to 15% 8 Scratch Hardnes (mohs) Min3 ISO-10545-5 Crazing Resistance 1 Cycle 4 cycle ISO-10545-8 Thermal Shock 10 Cycle Pass ISO-10545-Above >150 kg/cm Resistance 14 Modulus Rapture Resistance to all acid Resistance Chemical & stains except Hydrofluoric acid (HF) Resistance of stains Household Chemicals*

WallTiles

Digital Printing

	Naturally varying design	No	Yes
	Printing Accuracy	Low	High
©	Printing Consistency	Low	High
A	Printing resolution (DPI)	60-80	350 - 1000
\$	Print on uneven surface	Not Possible	Easily Possible
Ø	Customization	No	Easily Possible
	Edge to edge printing	No	Edge to edge printing
&	Design range	Limited	Endless
**	Number of printing colours	2-4	No limit

TILES FIXING INSTRUCTION

1. The final floated coat of the wall to be tiles should be with wood flat finish and coating should be completed at least two weeks before tiling begins. 2. The bedding mix used for fixing the tiles must not contain less than three part of sand (100 mesh) to one part of cement by volume. 3. The bedding mix should be used within its time limit, mix must be discarded. 4. The tiles must be immersed in clean water for at least as hour before tiling. 5. The tiles should be fixed as soon as surface water is gone. 6. Variation of size and weight occurred some times due to clay product.



^{*} Resistance to all acid except Hydrofluoric acid and its component





SOL is geared to make its presence felt everywhere. Be it on domestic front or on international markets, it is our aim to take the extraordinary range everywhere. With determined endeavors we are slowly but steadily making foray everywhere and expanding our reach. Currently, SOL is handling its nationwide and worldwide dealers and distributors network through offices in Ahmedabad, Gujarat and Dubai respectively. Best quality products with international appeal are our USP and we are poised to capture the export

Business Development Manager (South India): +91 90999 72960

Zonal Manager (North East India): +91 99090 07530

Area Sales Manager (Kerala): +91 99617 36735

Regional Sales Manager (Upper North India): +91 70877 91369

Area Sales Manager (East India): +91 97485 16772

Regional Sales Manger (Eastern U.P.): +91 90990 01596

Area Sales Manager (Eastern U.P.): +91 90990 06403

Area Sales Manager (Eastern U.P.): +91 90990 04637

Area Sales Manager (Maharashtra - Vidarbha): +91 99617 36735

Area Sales Manager (M.P. - Indore): +91 99617 36735 Area Sales Manager (Western U.P.): +91 99090 07530





INTERNATIONAL OFFICES

Post Box #150742, Sharjah, The United Arab Emirates Ph.: +97150 2605897, 6560563

Email: vp.uae@soltiles.in, gm.uae@soltiles.in

246, Bevelly Drive, Queens Burry, HA 85NB, London, England. Ph.: +44-77609 99620

Email: uk@soltiles.in

AUSTRALIA

44, Claremount Avenue, Greenacre, NSW 2190, Australia.

Ph.: +65-96707440 Email: aus@soltiles.in

Off. Enterprise Road, Ind. Area, P.O. Box - 18583-00500, Kenya Ph.: +254 20 6651164

Email: kenya@soltiles.in

HONGKONG

17 D, 3 Victoria Tower, 188 Canton Roadm Tsimshatsui, Kowloom, Hongkong

Email: hk@soltiles.in

SINGAPORE

Block No. 109, Lengkong Tiga, Singapore.

*Map not to scale

Ph.: +65-96707440 Email: sg@soltiles.in

SOUTH AFRICA

Cramond Road, Campsbay, Cape Town, South Africa, 8005

Email: sa@soltiles.in